


P/N: MPP 105J450V P=15

Capacitance	@ 1KHZ 23°C±3°C 1.0 µF	Tolerance 误差	±5%	Rated Voltage 额定电压	@ 25°C 50/60HZ 450V	<b>DRAWING &amp; MARKING</b>	Protection/Coating 外封装 Resin filled 灌封	Flame retardant epoxy resin (UL94V-0)
Dielectric	Polypropylene film	Plates 导体		Construction 结构	Winding	<b>DAIN</b>	Lead Wire 导线 Colour 颜色	Φ 0.6 tinned steel copper wires red

Dissipation Factor	@ 1K HZ 1Vrms 25°C max	1.6 times of rated voltage for 5 seconds cut off current at 10mA	50~60HZ 1KHZ 10KHZ 150KHZ	0.10% 0.15%	DC lead to lead 720VDC DC lead to case ..... VDC AC lead to lead ..... VAC AC lead to case ..... VAC			
Dielectric Withstanding Voltage	Between terminals 250VACx 200% 1To 5 sec max			900VDC				
Insulation Resistance	20°C@ 100 VDC 60 seconds min 20°C@..... VDC..... seconds min		Lead to lead ..... MΩ	>10000 MΩ*uf				
dv/dt	单位时间电压变化率 max		Lead to case ..... MΩ	(v/sec)				
IpeakA	@70°C		Amps					
IrmsA	@70°C		..... Amps					
Surge/Pulse voltage	140% rated voltage max		VDC					
E.S.R	等效串联阻抗阻抗值		Standard 依循标准	IEC384-2				
Safety approval	安规认证		Dimension(尺寸)mm					
			W	H	T	P		
			18.0(MAX)	13.5(MAX)	8.5(MAX)	15±1.0		
			dø	L.L				
			0.6±0.05	25.0±3.0				

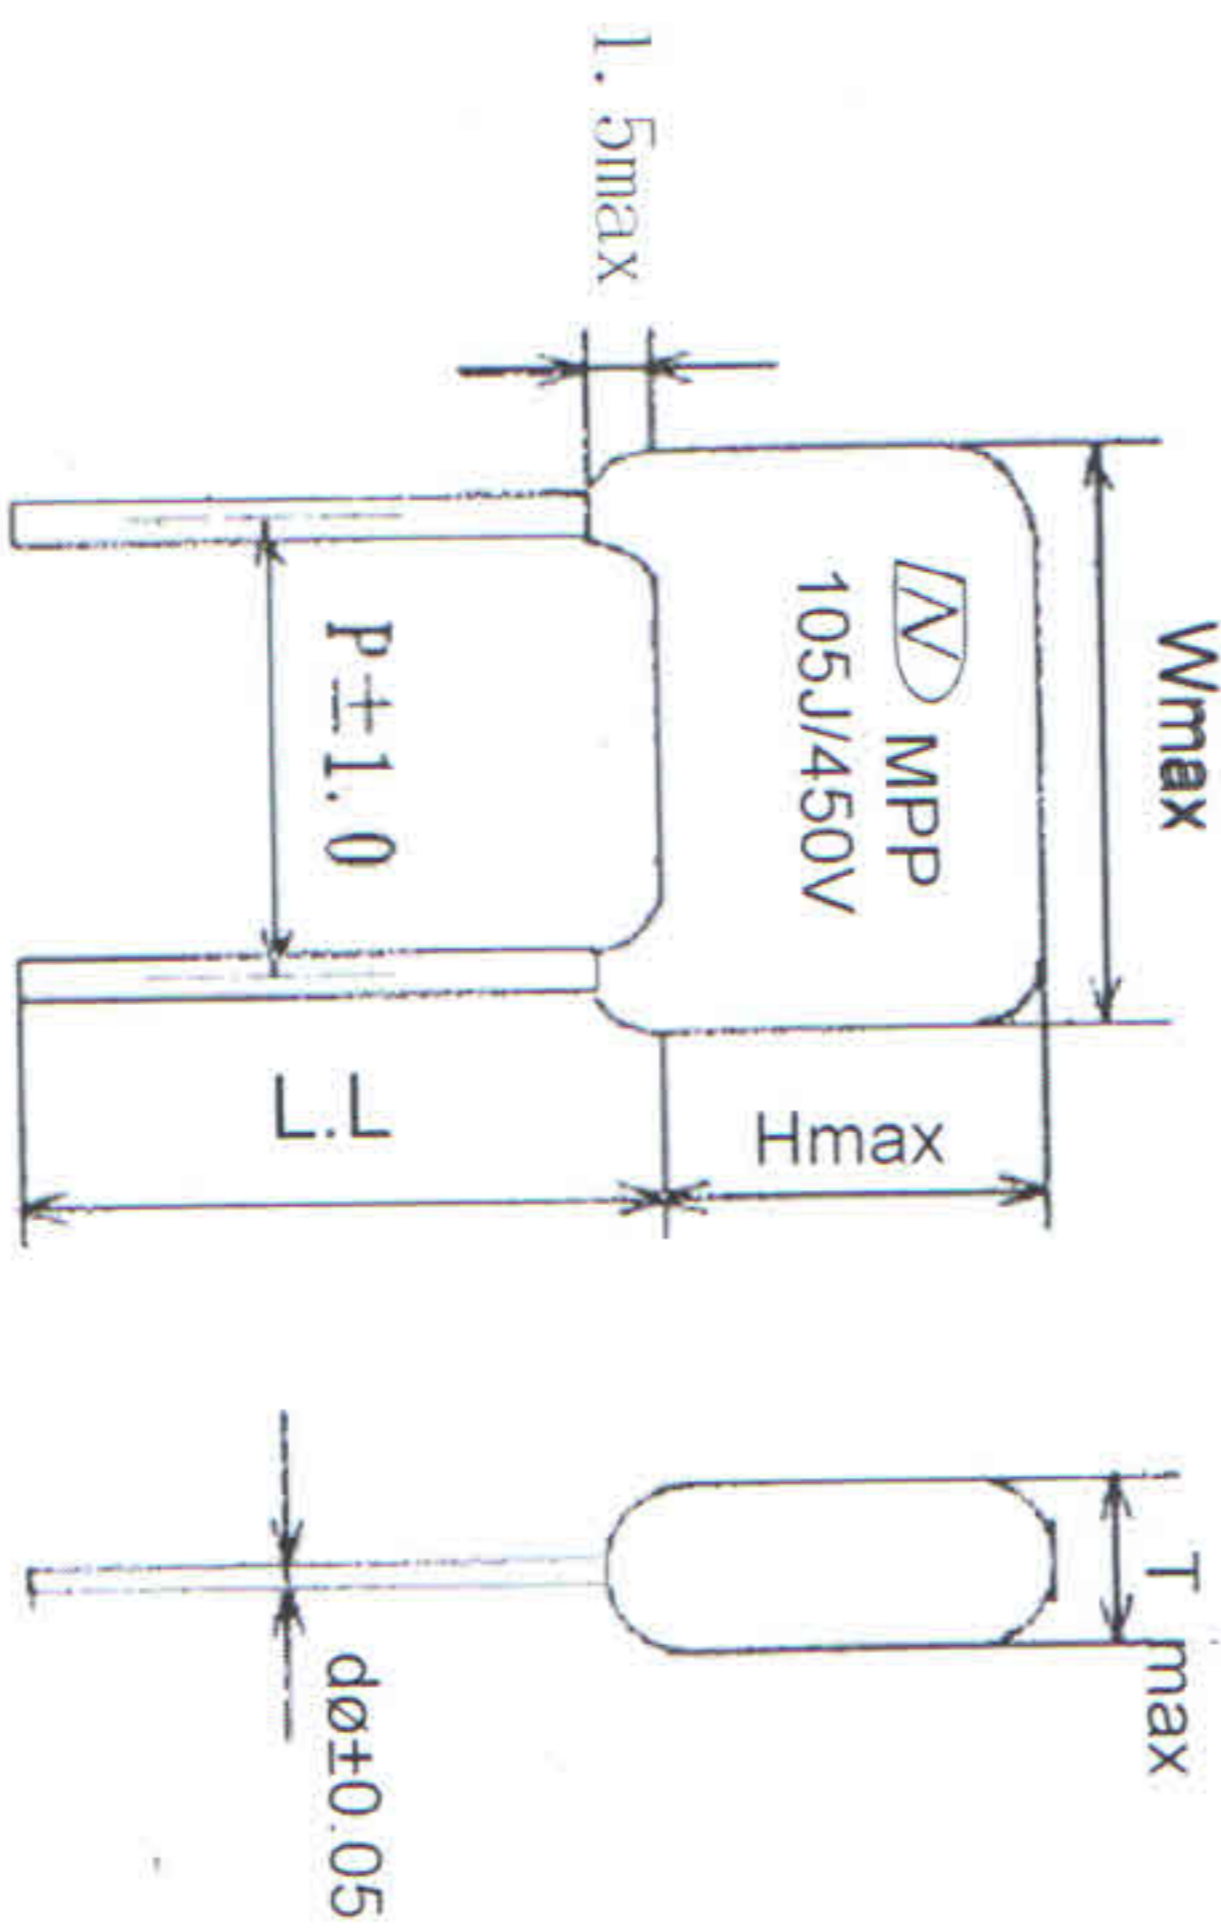

**ROHS**

Remark	备注:	Confirmation area 客户承认签回区	Operating Temperature 工作温度范围 From Minus -40 °C to Plus +105 °C	Designer 设计师	Design code 设计代码: MPP105J450V P=15
			DATE 日期: 2015-07-09	Drawing 绘图员	Approval 核准
			3RD ANGLE PROJECTION 第三角法		Drawing NO.
			SCALE	UNIT	mm