


P/N: MPP 105J450V P=15

Capacitance 容量	@ 1KHZ 23°C±3°C 1.0 µF	Tolerance 误差	±5%	Rated Voltage 额定电压	@ 25°C 50/60HZ 450V	DRAWING & MARKING	Protection/Coating 外封装 灌封	Flame retardant epoxy resin (UL94V-0)
Dielectric 介质	Polypropylene film	Plates 导体	Metallized Aluminum	Construction 结构	Winding	DAIN	Lead Wire 导线 颜色	Φ 0.6 tinned steel copper wires red

Dissipation Factor 损耗角	@ 1K HZ 1Vrms 25°C max	1.6 times of rated voltage for 5 seconds cut off current at 10mA	DC lead to lead DC lead to case AC lead to lead AC lead to case	720VDC VDC VAC VAC				
Dielectric Withstanding Voltage 介质耐压强度	Between terminals 250VACx 200% 1To 5 sec max		DC lead to lead DC lead to case AC lead to lead AC lead to case	900VDC VDC VAC VAC				
Insulation Resistance 绝缘阻抗	20°C@ 100 VDC 60 seconds min 20°C@..... VDC..... seconds min		Lead to lead Lead to case	>10000 MΩ*uf MΩ				
dv/dt 单位时间电压变化率	max		Max pulse rise time	(v/sec)				
IpeakA 最大值电流	@70°C			Amps				
IrmsA 实效值电流	@70°C			Amps				
Surge/Pulse voltage 冲击电压	140% rated voltage max			VDC				
E.S.R 等效串联阻抗阻抗值								
Safety approval 安规认证								

ROHS

Remark 备注:	Confirmation area 客户承认签回区	Operating Temperature 工作温度范围 From Minus -40 °C to Plus +105 °C	Designer 设计师	Design code 设计代码: MPP105J450V P=15
	DATE 日期: 2015-07-09	3RD ANGLE PROJECTION 第三角法	Drawing 绘图员	Approval 核准
	SCALE	UNIT	mm	Drawing NO.

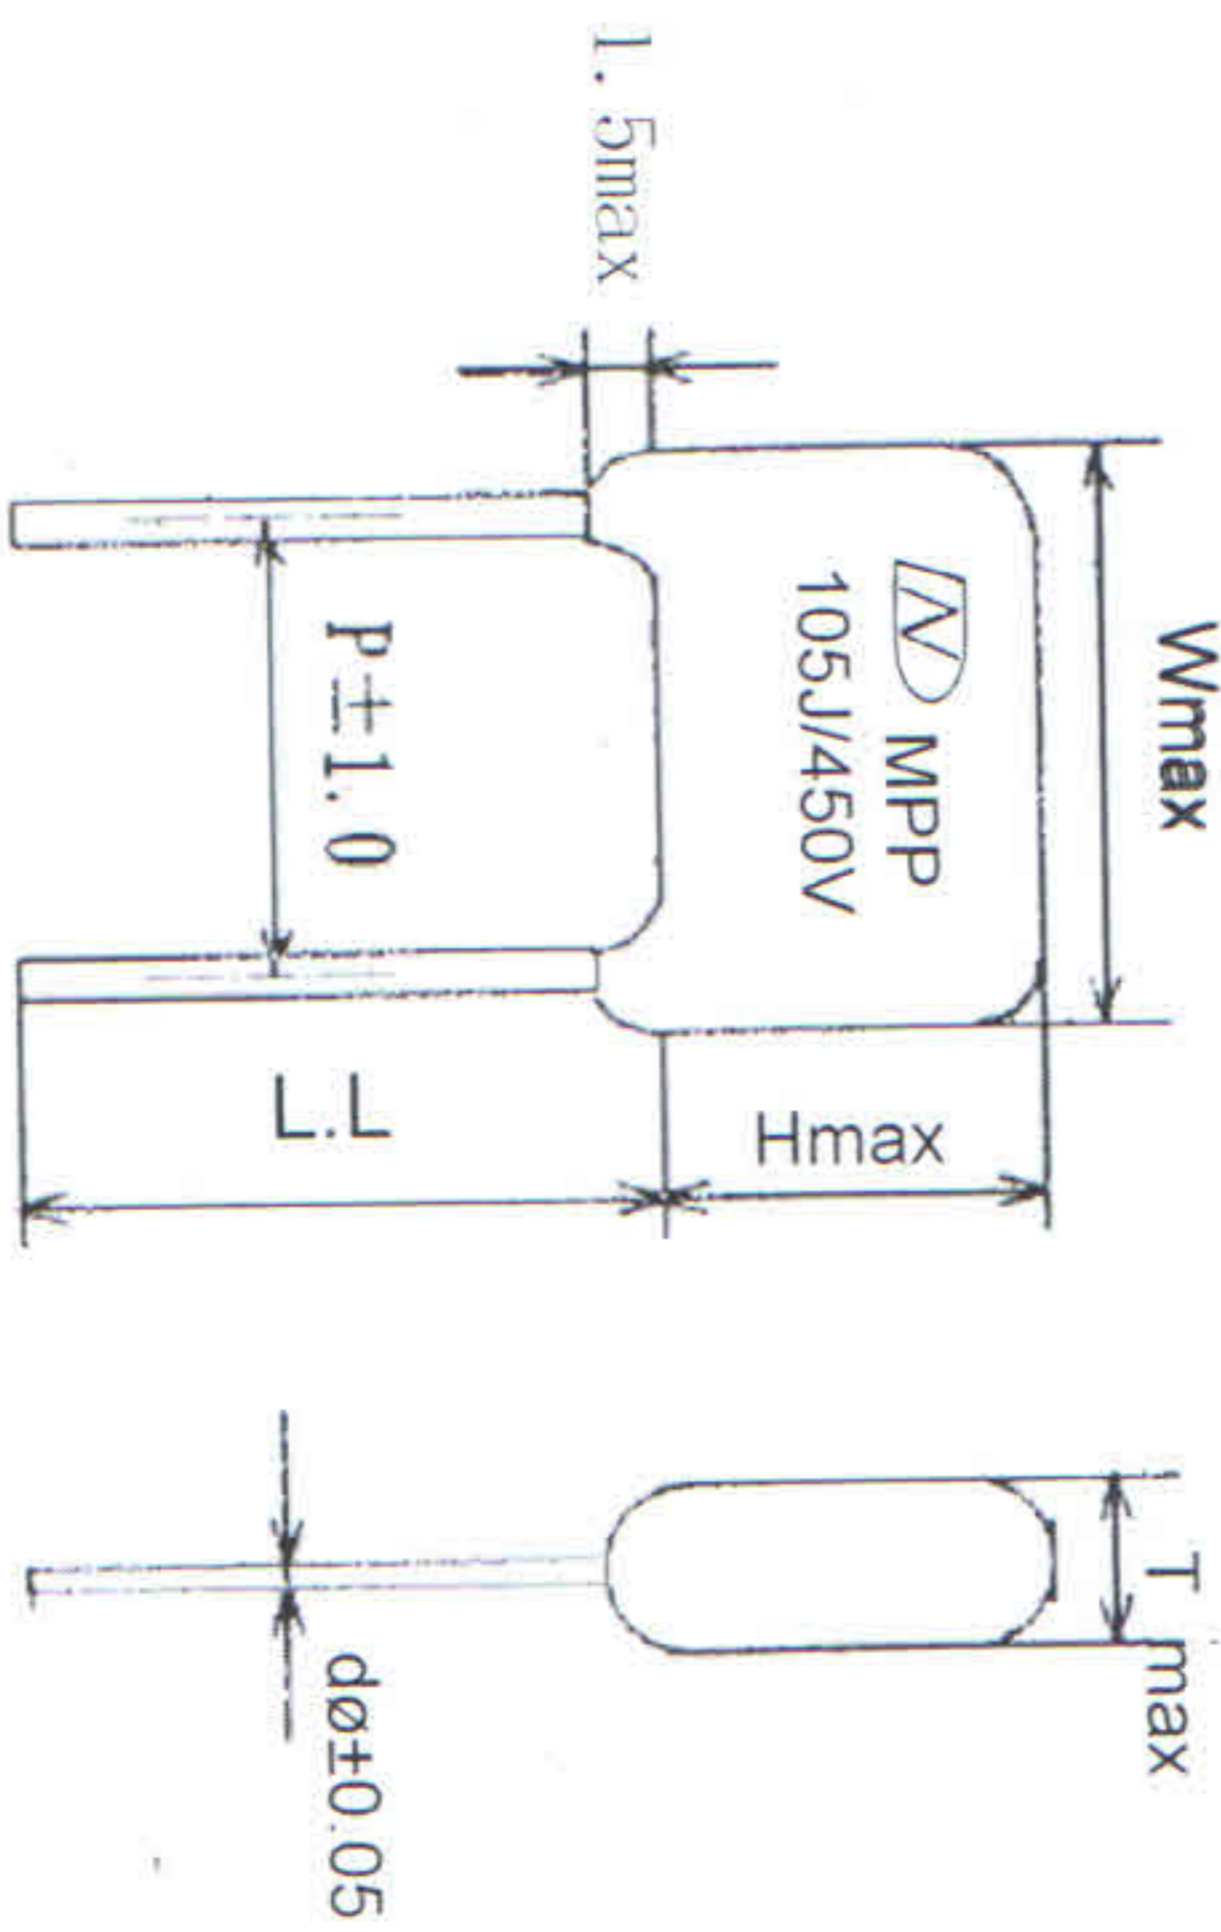

激光印字