
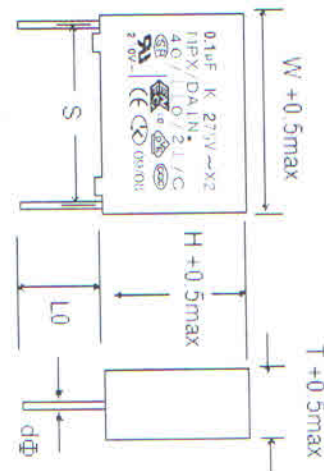



P/N: X2 104K275VAC P=10

Capacitance 容量	@ 1KHZ 23°C±3°C	Tolerance 误差	±10%	Rated Voltage 额定电压	@ 25°C 50/60HZ 275VAC	Protection/Coating 外封装	PBT plastic box		
	0.1 µF	Plates 导体					Flame retardant		
Dielectric 介质	Polypropylene film		Metallized film 50~60HZ	Construction 结构	Winding	Lead Wire 导线	Φ 0.6 tinned wires		
Dissipation Factor 损失角	@ 1K HZ 1Vrms 25°C max	4.3 times of rated voltage for 5 seconds cut off current at 10mA	1KHZ	0.10%		Resin filled 灌封			
			10KHZ	1.30%					
			150KHZ						
Test Voltage 测试电压	Between terminals 275VAC×200% 1To 5 sec max	20°C@ 100 VDC 60 seconds min 20°C@.....VDC..... seconds min	DC lead to lead	1200VDC		Lead Wire 导线	yellow		
			DC lead to case	VDC					
			AC lead to lead	VAC					
Dielectric Withstanding Voltage 介质耐压强度	Between terminals 275VAC×200% 1To 5 sec max	20°C@ 100 VDC 60 seconds min 20°C@.....VDC..... seconds min	AC lead to case	VAC					
Insulation Resistance 绝缘阻抗			Lead to lead	>5000 MΩ·uf					
			Lead to caseMΩ					
dV/dt 单位时间电压变化率			Max pulse rise time	(v/sec)					
IpeakA 最大值电流	@70°C			Amps					
IrmsA 有效值电流	@70°C		Amps					
Surge/Pulse voltage 冲击电压	140% rated voltage			VDC					
E.S.R 等效串联阻抗抗值			Standard 依循标准	IEC60384-14					
Safety approval安规认证			Dimension(尺寸)mm				W +0.5max H +0.5max L0 S T +0.5max dΦ		
			W	H	T			S	
			13(±0.5)	11(±0.5)	6(±0.5)			10±1.0	
	0.6±0.05	22.0±3.0							
Remark 备注:			Confirmation area 客户承认签回区 B. P. IMPLEX PVT. LTD. 206, 9/2, EAST PATEL NAGAR, NEW DELHI-110008.		Operating Temperature 工作温度范围 From Minus -40 °C to Plus +85°C DATE 日期: 2015-07-09 3RD ANGLE PROJECTION 第三角法		Designer 设计师 Design code 设计代码: X2 104K/275VAC P=10 C2-1		
			SCALE	~	UNIT	mm	Drawing 绘图员	Approval 核准	Drawing NO

激光印字

DRAWING & MARKING
DAIN