




P/N: X2 473K275VAC P=10

Capacitance 容量	@ 1KHZ 23°C±3°C	Tolerance 误差	±10%	Rated Voltage 额定电压	Construction 结构	Winding	Protection/Coating 外封装 灌封	PBT plastic box Flame retardant		
	0.047 µF								@ 25°C 50/60HZ 275VAC	
Dielectric 介质	Polypropylene film	Plates 导体	Metallized film	50~60HZ 1KHZ 10KHZ 150KHZ	0.10% 1.30%	DC lead to lead 1200VDC DC lead to case VDC AC lead to lead VAC AC lead to case VAC	Lead Wire 导线 颜色	Φ 0.6 tinned wires yellow		
Dissipation Factor 损耗角	@ 1K HZ 1Vrms 25°C max									
Test Voltage 测试电压	4.3 times of rated voltage for 5 seconds cut off current at 10mA									
Dielectric Withstanding Voltage 介质耐压强度	Between terminals 275VAC X 200% 1T to 5 sec max			1800VDC						
Insulation Resistance 绝缘阻抗	20°C @ 100 VDC 60 seconds min 20°C @ VDC seconds min			>5000 MΩ*uf						
dv/dt 单位时间电压变化率	max			Lead to case MΩ						
IpeakA 最大值电流	@70°C			Amps						
IrmsA 实效值电流	@70°C		 Amps						
Surge/Pulse voltage 冲击电压	140% rated voltage max			VDC						
E.S.R 等效串联阻抗抗值				Standard 依循标准	IEC60384-14					
Safety approval 安规认证		Dimension (尺寸) mm		W		H		T		
		13(±0.5)		11(±0.5)		6(±0.5)		10(±1.0)		
0.6±0.05		22.0±3.0								
Remark 备注:			Confirmation area 客户承认签回区			Operating Temperature 工作温度范围 From Minus -40 °C to Plus +85°C			Designer 设计师	
<p>B. P. IMPREX PVT. LTD. 206, 9/2 EAST PATEL NAGAR, NEW DELHI-110008.</p>			DATE 日期: 2015-07-09		3RD ANGLE PROJECTION 第三角法		Drawing 绘图员		Approval 核准	
			SCALE		UNIT		mm		Drawing NO	

DRAWING & MARKING

DAIN

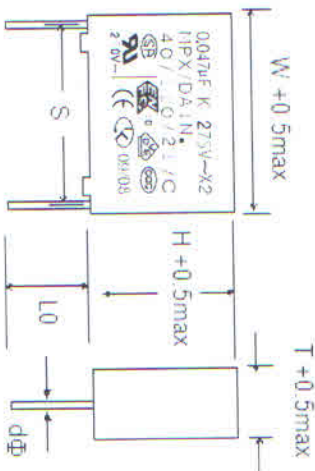

激光印字

Design code 设计代码:
X2 473K275VAC P=10 C2-1