


P/N: X2 474K310VAC P=22.5MM

DRAWING & MARKING		Protection/Coating 外封装 Resin filled 灌封	PBT plastic box Flame retardant
DAIN		Lead Wire 导线 Colour 颜色	Φ 0.6 tinned wires yellow

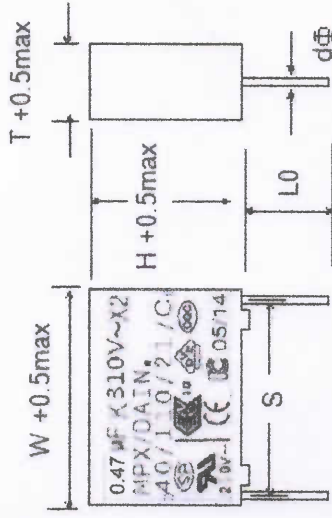

激光印字

Capacitance 容量	@ 1KHZ 23°C±3°C	Tolerance 误差	Rated Voltage 额定电压	@ 25°C 50/60HZ
	0.47 μF		Construction 结构	310VAC
Dielectric 介质	Polypropylene film	Plates 导体	Metalized film	Winding
			50~60HZ	
Dissipation Factor 损失角			1KHZ	
			10KHZ	
Test Voltage 测试电压			150KHZ	
			DC lead to lead	1333VDC
Dielectric Withstanding Voltage 介质耐压强度			DC lead to caseVDC
			AC lead to leadVAC
Insulation Resistance 绝缘阻抗			AC lead to caseVAC
				1800VDC
dv/dt 单位时间电压变化率			Lead to lead	>5000 MΩ*uf
			Lead to caseMΩ
IpeakA 最大峰值电流			Max pulse rise time	(v/sec)
				Amps
IrmsA 实效值电流			Amps
				VDC
Surge/Pulse voltage 冲击电压			Standard 依循标准	IEC60384-14
E.S.R 等效串联阻抗抗值				
Safety approval 安规认证				

Remark 备注:	Confirmation area 客户承认签回区	Operating Temperature 工作温度范围 From Minus -40 °C to Plus +110°C	Design code 设计代码: X2 474K/310VAC P=22.5
		DATE 日期: 2019-04-01	Designer 设计师
Safety approval 安规认证		3RD ANGLE PROJECTION 第三角法	Drawing 绘图员
		SCALE ~ UNIT mm	Approval 核准
		Drawing NO.	

B.P. Impex Pvt. Ltd., 12/4, 1st Floor, East Patel Nagar, New Delhi 110008.