


DRAWING & MARKING		Flame retardant epoxy resin (UL94V-0)
Protection/Coating 外封装		Resin filled 灌封
Lead Wire 导线		Φ 0.6 tinned steel copper wires
Colour 颜色		red

DAIN

Capacitance 容量	@ 1KHZ 23°C±3°C	Tolerance 误差	±5%	Rated Voltage 额定电压	@ 25°C 50/60HZ	400V
Dielectric 介质	Polypropylene film	Plates 导体	Metallized Aluminum	Construction 结构	Winding	
	Dissipation Factor 损失角	@ 1K HZ 1Vrms 25°C, max	50~60HZ 1KHZ 10KHZ 150KHZ	0.10% 0.15%		
Test Voltage 测试电压	1.6 times of rated voltage for 5 seconds cut off current at 10mA		DC lead to lead DC lead to case AC lead to lead AC lead to case	640VDCVDCVACVAC		
Dielectric Withstanding Voltage 介质耐压强度	Between terminals 250V ACx 200% 1To 5 sec max			700VDC		
Insulation Resistance 绝缘阻抗	20°C@ 100 VDC 60 seconds min		Lead to lead	>10000 MΩ*uf		
dv/dt 单位时间电压变化率	20°C@.....VDC..... seconds min		Lead to caseMΩ		
IpeakA 最大值电流	max		Max pulse rise time	(v/sec)		
IrmsA 实值电流	@70°C			Amps		
Surge/Pulse voltage 冲击电压	140% rated voltage max		Amps		
E.S.R 等效串联阻抗抗值			Standard 依循标准	VDC	IEC384 -2	
Safety approval 安规认证			Dimension(尺寸)mm			
	W	H	T	P		
	18.0(MAX)	11.5(MAX)	6.5(MAX)	15±1.0		
		dø	L.L			
		0.6±0.05	25.0±3.0			

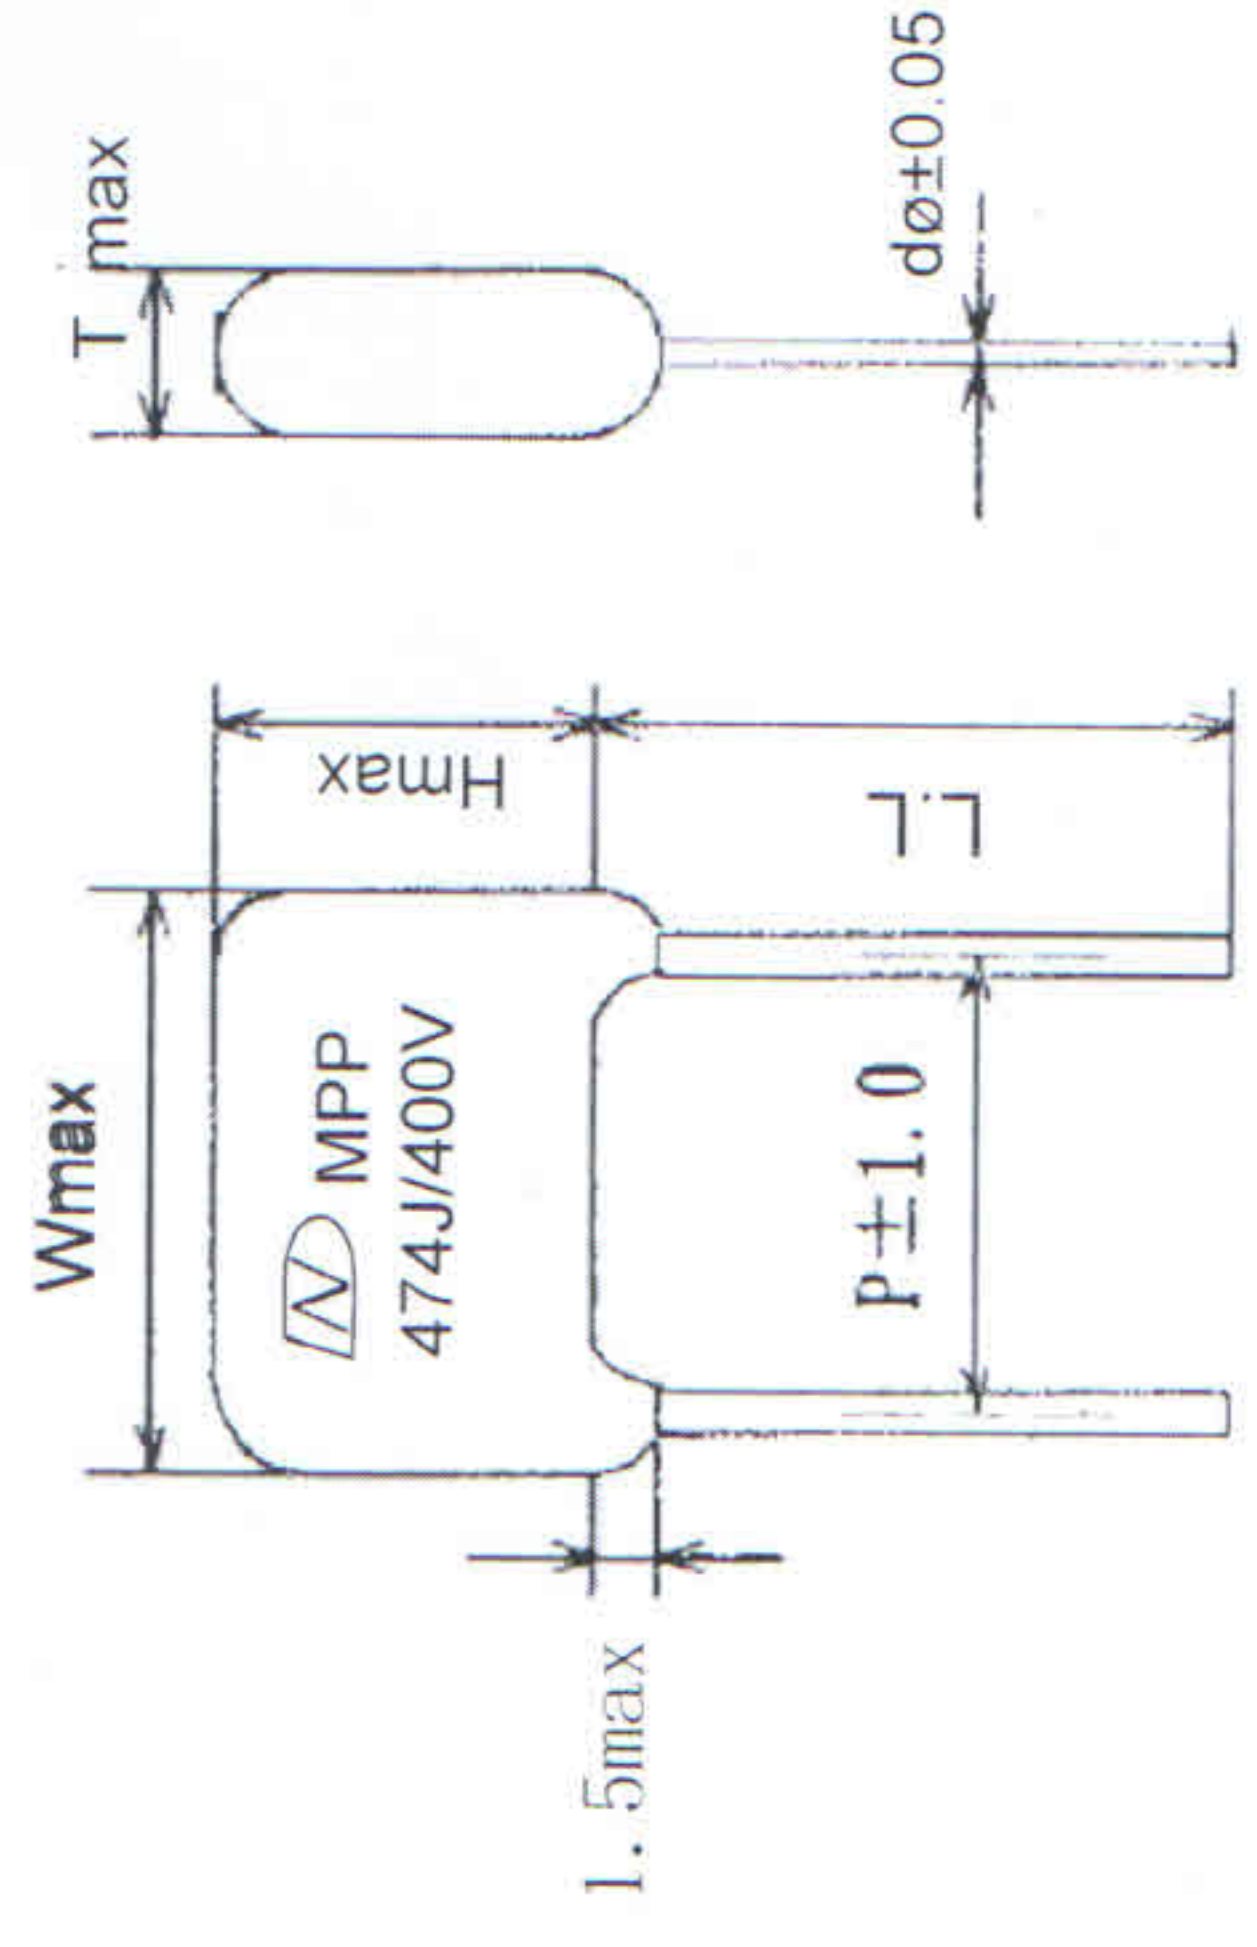

激光印字

Remark 备注:	Confirmation area 客户承认签回区		Operating Temperature 工作温度范围 From Minus -40 °C to Plus +105°C	Designer 设计师	Design code 设计代码: MPP 474J400V P=15
	RoHS		DATE 日期: 2015-07-09	Drawing 绘图员	Drawing NO.
		3RD ANGLE PROJECTION 第三角法	SCALE ~	Approval	
		UNIT mm			